



KINTRONIC LABS INC.

WEATHERPROOF RACK

Cooling & Heating



Fig. 1 Two-Door Painted



Fig. 2 Unpainted showing FM TX

Unpainted P/N WPR-26-24-29

Painted P/N WPR-26-24-29-P

ENCLOSURE DIMENSIONS (W x D x H): **26" x 24" x 29"**

NEMA3R compliant

All outdoor rack enclosures manufactured by KINTRONIC are of heavy duty aluminum construction, and come standard with A/C and Heater including thermostatic controls for extreme heat or cold conditions.

5,000-BTU Air Conditioner automatically resumes operating at its previous settings when the power is restored to your unit.

Single housing with weatherproof top; weather sealed front and rear hinged doors.

19-inch rack rails and provisions for mounting on two vertical uprights.

A/C specifications	
Cooling BTU	5000
Equivalent Room Size Cooling Capacity (sq. feet)	150
Energy Efficiency Ratio (E.E.R.)	11
Voltage (volts) (optional 220 VAC)	115 VAC (220 VAC)
Current (amps) - Cool	4.8 @ 115 VAC
Power (watts) – Cool	515
Low Voltage Compensation	Yes
Multi-Directional Air Control	2-way
Fan Only Option	Yes
Cooling Fan Speeds	2
Filter Type	Anti-bacterial mesh
UL Listed	Yes
Adjustable Thermostat	Yes
Sleep Mode (Controlled by main thermostat)	Yes
Temperature Control with Hysteresis Cycle	Digital
Hysteresis Threshold	Adjustable
Max. / Min. Temperature Setting (Factory preset)	Adjustable
Automatically resumes operating when power is restored	Yes
Warranty (year)	1
HEATER specifications	
Voltage (volts)	120
Adjustable Thermostat	Yes
Sleep Mode (Controlled by main thermostat)	Yes
Temperature Control with Hysteresis Cycle	Digital
Hysteresis Threshold	Adjustable
Max. / Min. Temperature Setting (Factory preset)	Adjustable
Automatically resumes operating when power is restored	Yes
Power (watts)	500
Warranty (year)	1

Cooling / Heating - Hysteresis Cycles

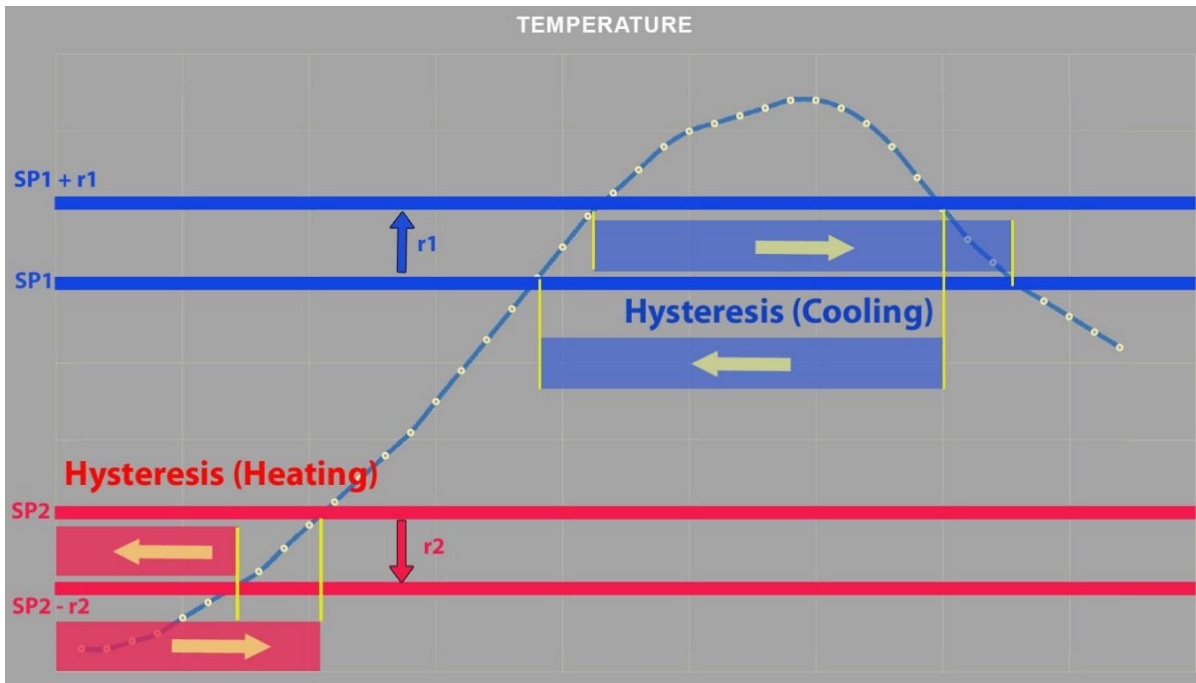


Fig. 7 Hysteresis parameters

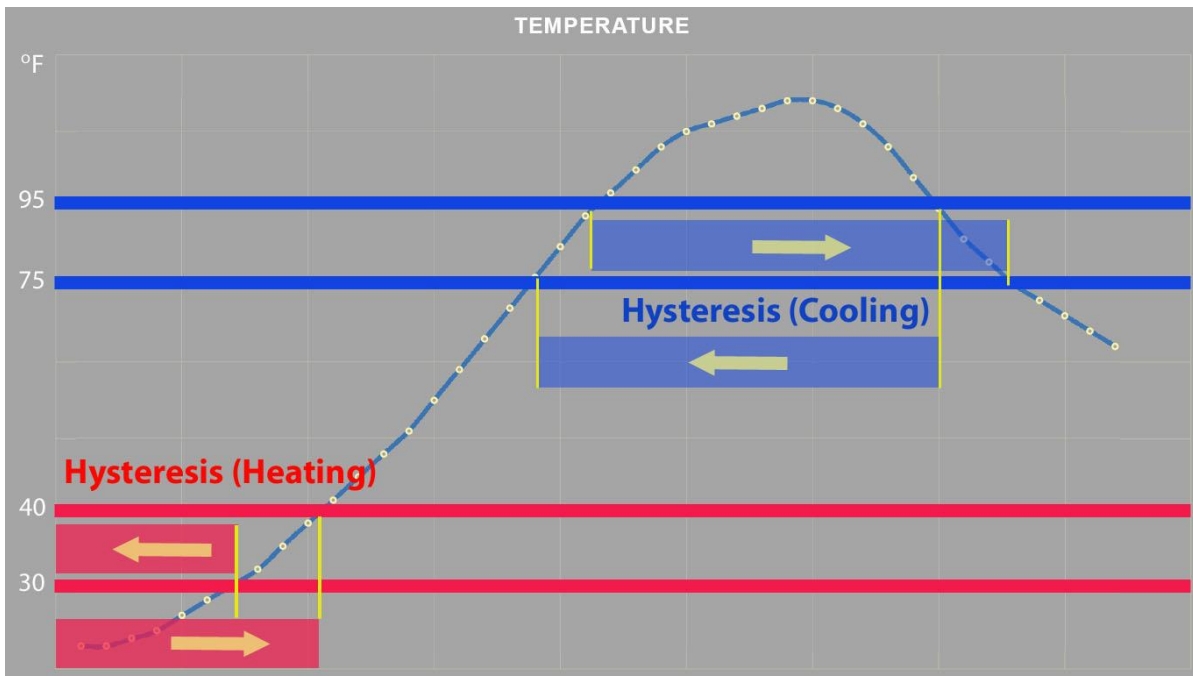


Fig. 8 Hysteresis – KTL factory settings

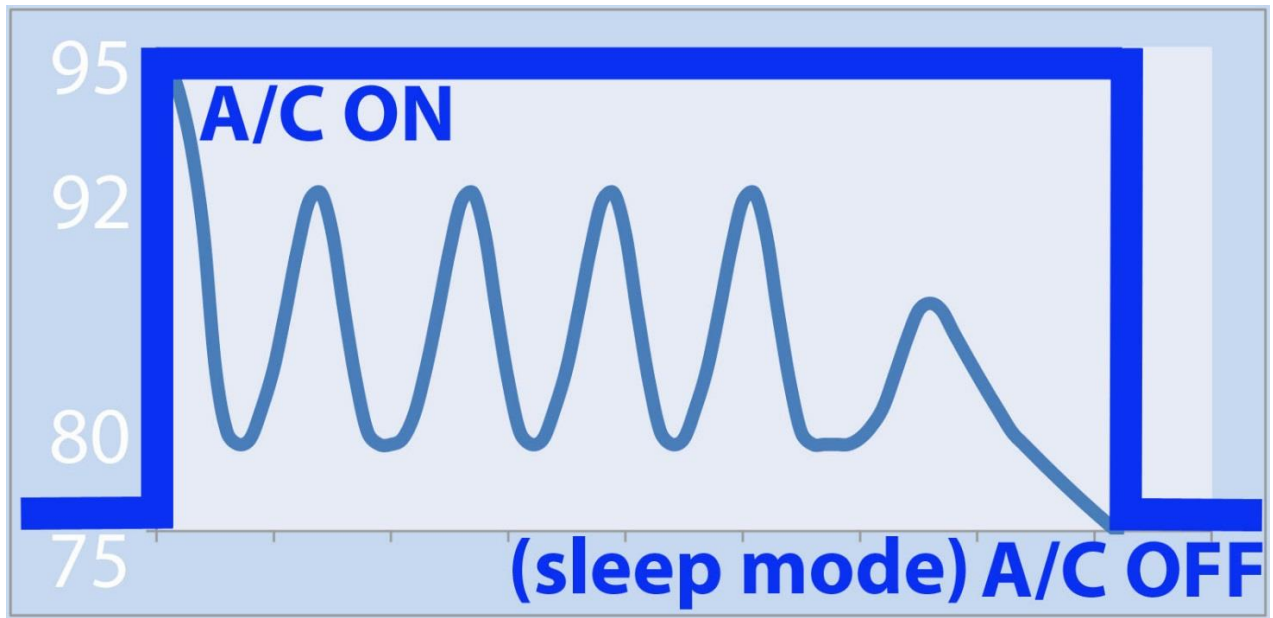


Fig. 9 A/C Manual Thermostat Settings

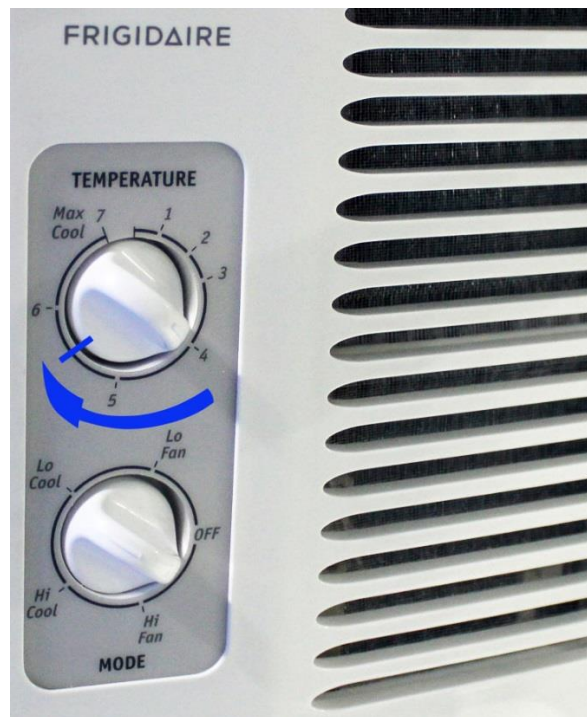


Fig. 10 A/C Thermostat Settings: LoCool & Temperature Level 5.5