




KINTRONIC LABS

an ISO 9001 registered company

VLF/ LF/ MW TRANSMITTER TRANSFER SWITCHES

DESIGNED TO PERMIT ROUTING OF MAIN AND/ OR STANDBY TRANSMITTERS TO EITHER AN ANTENNA OR DUMMY LOAD

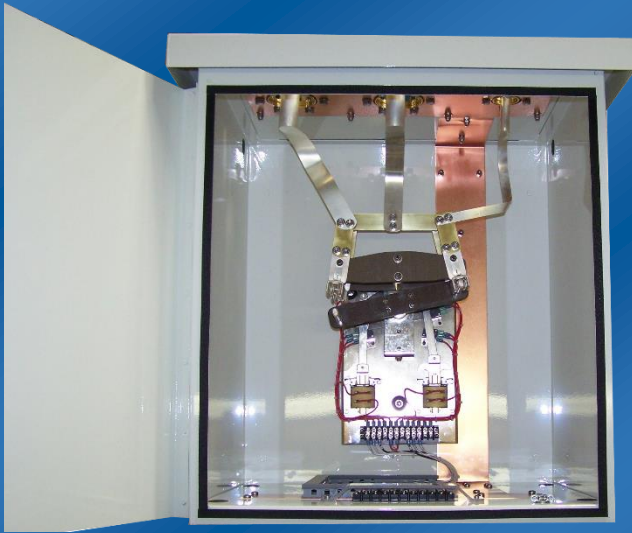


RF Contactor Options:

1. RFC40-20 Series
2. RFC80-30 Series
3. RFC100-35 Series
4. RFC200-30 Series

Configurations:

1. SPDT 3-port
2. DPDT 4-port
3. Custom port locations

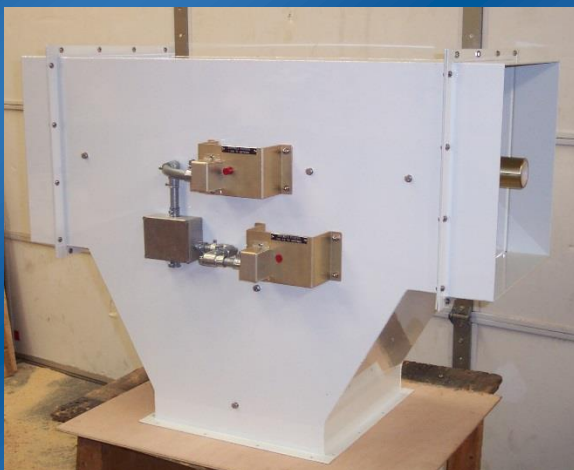

Custom Switches Are Available

Configurations including ducted lines to fit existing installations

Units are available with more than 5 ports and multiple switches for more complex switching units





KINTRONIC LABS

an ISO 9001 registered company

Standard Main/Aux/Dummy Switch Configurations

Model MADSH42(1/2)(110/220)

Power Rating: 1-38 kw*
Input Options: 1/2", 7/8", 1-1/4" or 1-5/8"
Cable Clamp or EIA flange
Port Options: Three-Port, Four Port
AC Options: 110 VAC/220VAC, 50/60 Hz
Cabinet Dims: Wall Mountable** - 20"Wx 20"Hx16"D
19" Standard Rack Mountable - 19"Wx16"Hx20"D
RF Contactor: Model RFC40-20-1/2-110/220
SPDT/DPDT 40 AMP, 20KV
Electrically-driven by solenoids

Model MADSH83(1/2)(110/220)

Power Rating: 38-178 kw*
Input Options: 1-1/4", 1-5/8", 2-1/4", 3-1/8", 4-1/16"
Cable Clamp or EIA flange
Port Options: Three-Port, Four Port
AC Options: 110 VAC/220VAC, 50/60 Hz
Cabinet Dims: Wall Mountable** - 20"Wx 20"Hx16"D
19" Standard Rack Mountable - 19"Wx16"Hx20"D
RF Contactor: Model RFC80-30-1/2-110/220
SPDT/DPDT 80 AMP, 30KV
Electrically-driven by solenoids

Model MADSH103(1/2)(110/220)

Power Rating: 178-350 kw*
Input Options: 3-1/8", 4-1/16", 6-1/8" EIA flange
Port Options: Three-Port, Four Port
AC Options: 110 VAC/220VAC, 50/60 Hz
Cabinet Dims: Wall Mountable** 20"Wx 20"Hx16"D
RF Contactor: Model RFC100-35-1/2-110/220
SPDT/DPDT 80 AMP, 30KV
Electrically-driven by solenoids

Model MADSH203(1/2)(110/220)

Power Rating: 350-1,800 kw*
Input Options: 4-1/16", 6-1/8", 9-3/16" EIA flange
Port Options: Three-Port, Four Port
AC Options: 220 VAC, 50/60 Hz
Cabinet Dims: Wall Mountable** 40"Wx 35"Hx27"D
RF Contactor: Model RFC200-30-1/2-220
SPDT/DPDT 200 AMP, 30KV
Electrically-driven by linear actuator

* Dependent on connector size

**Dummy Load Option: 1kw Wall Mountable Units Are Available With An Integrated Dummy Load (The cabinet will be slightly larger in this case).

Kintronic Labs offers a full line of replacement parts that are in stock for the RF Contactors, ready for immediate delivery.

Custom Single and Multiple Contactor Switching Units are also available.

Manual operation option available.